


THE WORLD OF MILLER

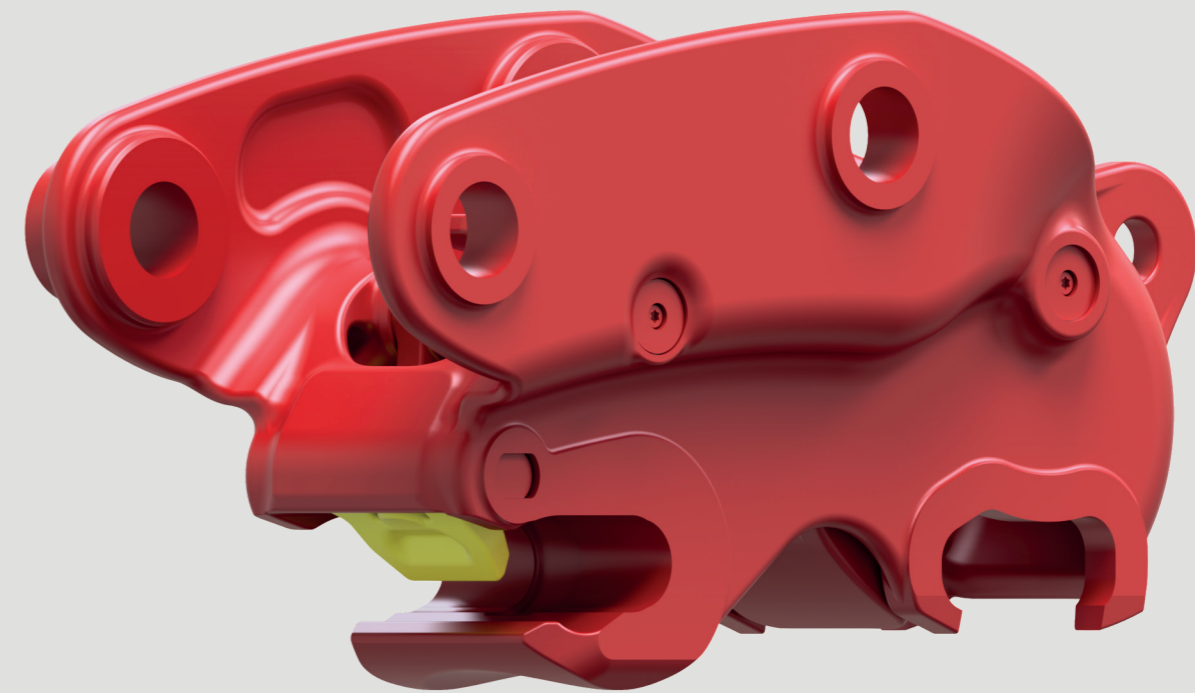

UK

Bassington Lane
Bassington Industrial Estate
Cramlington
Northumberland
NE23 8AD

INFO@MILLERGROUNDBREAKING.COM



AUSTRALIA

Miller Australia Pty Ltd,
Unit 1/12
Technology Drive,
Appin,
NSW, 2560

INFO@MILLERGROUNDBREAKING.COM.AU

INDIA

No. B-378/1-2, 1st Floor
PID 11-161-B378/1-2,
1st Block, 100 Feet Ring Road,
Peenya Industrial Estate
Bangalore - 560058

INDIA@MILLERGROUNDBREAKING.COM


MILLERGROUNDBREAKING.COM

MILLER GTX

PERFORMANCE CONNECTED TO **SAFETY**
HYDRAULIC QUICK COUPLER FROM 8 TO 50TONNES

MILLER GTX

HYDRAULIC QUICK COUPLER SUITABLE FOR EXCAVATORS FROM 8 TO 50 TONNE.

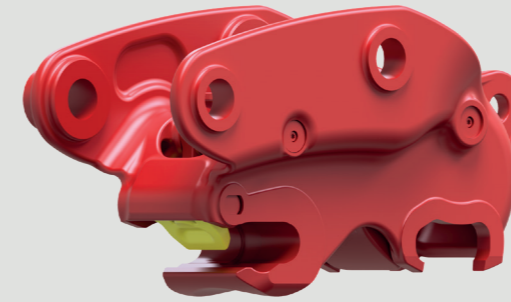

MILLER GTX

PERFORMANCE
CONNECTED TO **SAFETY**

The Miller GT series heralds a new era of unrivalled power and cutting-edge intelligent coupler technology increasing job site safety, machine versatility and productivity.

The latest Miller GT coupler delivers the safest, lightest, lowest, yet strongest class leading quick coupler in the marketplace. Easy to operate and far lighter and stronger than any other quick hitch coupler, it's time to make the most of your machines' performance.

Miller GTX offers an ISO 13031 compliant novel locking system, designed to ensure that the widest set of OEM pin pickups are safely attached all from the comfort and security of your cab - a true industry benchmark for safety.

Our innovative "GroundTouch (GT)" Quick Coupler series features our revolutionary intelligent coupler sensor connect system, which will only allow attachment change process to commence when the attachment is safely placed on the ground - going above and beyond legislative requirements.



GLOBAL COMPLIANCE

INNOVATIVE INDEPENDENT BACK UP SYSTEM ENSURES THAT THE ATTACHMENT REMAINS SECURELY ENGAGED.



UNIVERSAL OEM CAPABILITIES

TURN YOUR EXCAVATOR FROM A DIGGING MACHINE TO A MULTI-TOOLED CARRIER, MAXIMISING MACHINE UPTIME.



SLIMLINE DESIGN

LOWEST PROFILE DESIGN PROVIDES A SHORTER PIN TO POINT MEASUREMENT DELIVERING MAXIMUM BREAKOUT FORCE FOR GREATER PRODUCTIVITY.



SIMPLE MAINTENANCE

SPRING FREE, REDUCED INTERNAL COMPONENT COUNT, DELIVERING A TRUE FIT AND FORGET HASSLE FREE SOLUTION.



HIGH-STRENGTH CAST DESIGN

100% CAST FROM HIGH TENSILE STEEL, DELIVERING EXCEPTIONALLY STRONG PERFORMANCE DESPITE BEING THE LIGHTEST IN ITS CLASS.



TWIN LOCK

QUICK, SAFE ATTACHMENT CHANGES IMPROVING ON SITE SAFETY WHILST MAXIMISING MACHINE PRODUCTIVITY WITH LESS DOWN TIME.

TECHNICAL SPECIFICATION

MACHINE SELECTOR

GT Series	Excavator Weight	Pin Diameter	Pin Centres	Pick up Width		R3	R4	R5	R6	R7	R8	R9
Range 3	6-10T	50	280-317	164	TONNAGE	6-9T	10-15T	16-18T	19-21T	22-27T	28-35T	36-45T
		60	290-320		CASE	CX75/CX80	CX130DCX145DSR	CX160D/CX180D	CX210D	CX230D/240D/ CX250D/ CX300D- CX245DSR	CX350D	CX370D/CX490D
Range 4	11-14T	60	345-415	216	CAT	307/308D&E	311F/313F	315F/316F/318F	320F/323F	325/326F	330/335	336/340F
		65	355-420		DOOSAN		DX140/160/DX140W		DX180/DX225	DX225/DX290/ DX300	DX340	DX420
Range 5	15-19T	70	376-472	272	HITACHI	ZX65/ZX70/ ZX85	ZX130/ ZX135	ZX160	ZX180/ ZX190/ZX200/ ZX210/ ZX225	ZX240/ZX250/ ZX280	ZX300/ZX330/ZX350	ZX400/ZX470/ZX490
		80	391-477		HYUNDAI	R80-9	R125/HX130/HX140/ HX145	HX160/HX180		HX220/HX235/ HX260	X300/330/380/430	HX480
Range 6	20-22T	80	430-520	302	JCB		JS130/131/JS140Z/141	JS160/JS180	JS190/JS210/220X	JS240/JS260	S300/JS330/JS370	JS460
		90	458-525	321	KOBELCO	SK75/SK85	SK140	SK150/ED160/SK180	SK200/SK210/SK230	SK260/SK270	SK300/SK330/SK350	SK380/SK400
Range 7	24-29T	90	482-602	340	KOMATSU	PC80/PC88	PC130/PC138/PW140/ PW148	PC160/PC170/PC180	PC210/PC215	PC228/PC230/ PC240/PC290	PC350/PC360/PC365	PC450/PC490
		100	500-607		KUBOTA	KX080						
Range 8	30-38T	100	536-630	396	LIUGONG	908C/D	915D		922D/E	925D/E/930E	936D	945E/950E
		110	542-608		SANY		SY135C		SY215C	SY235C	SY335C	SY365
Range 9	39-48T	100			VOLVO	ECR88	EC140E, ECR145E	EC160E/EC180E		ECR235E/ ECR250E/EC300E	ECR355E	ECR380E/EC480E
		110										